

HOT MELT ADHESIVE SUPPLY UNIT



DYNAMINI™


The Dynatec Advantage

- **MELT-ON-DEMAND Hopper Grid** extends adhesive life and performance
- **Self-diagnostic P.I.D. Digital Temperature Controller** with platinum sensor accuracy
- **110/120V and 200/240V configurations** fitted with either a piston or gear pump
- **Easily removable access covers** completely expose all components for easy maintenance

ITW Dynatec™


Adhesive Application Solutions

DYNAMINI™ ADHESIVE SUPPLY UNIT

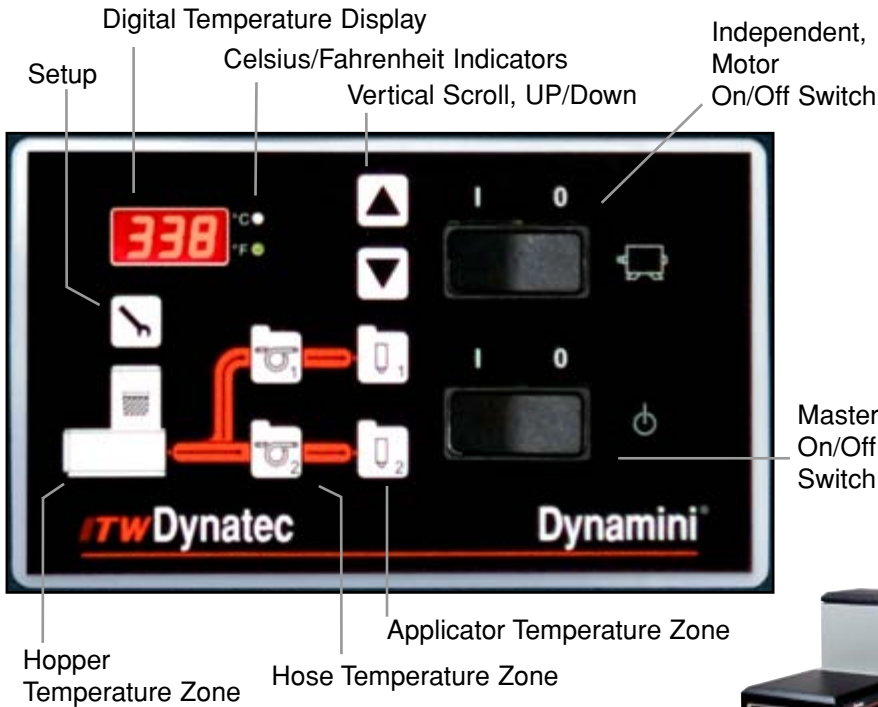

MODEL	N05	N10
Hopper Capacity	5 kg 10 lbs	9 kg 20 lbs
Melt Rate (per hour) *	240 volts 30 amps	8 kg 17 lbs
	110/115 volts 15 amps	5.4 kg 12 lbs
Unit Dim.	Height	41,9 cm 16.5 in
	Footprint	28.79 x 54.0 cm / 11.38 x 21.25 in

* Melt rates vary with adhesive type. All units capable of 2 hoses and applicators. Units can be fitted with a piston or gear pump.

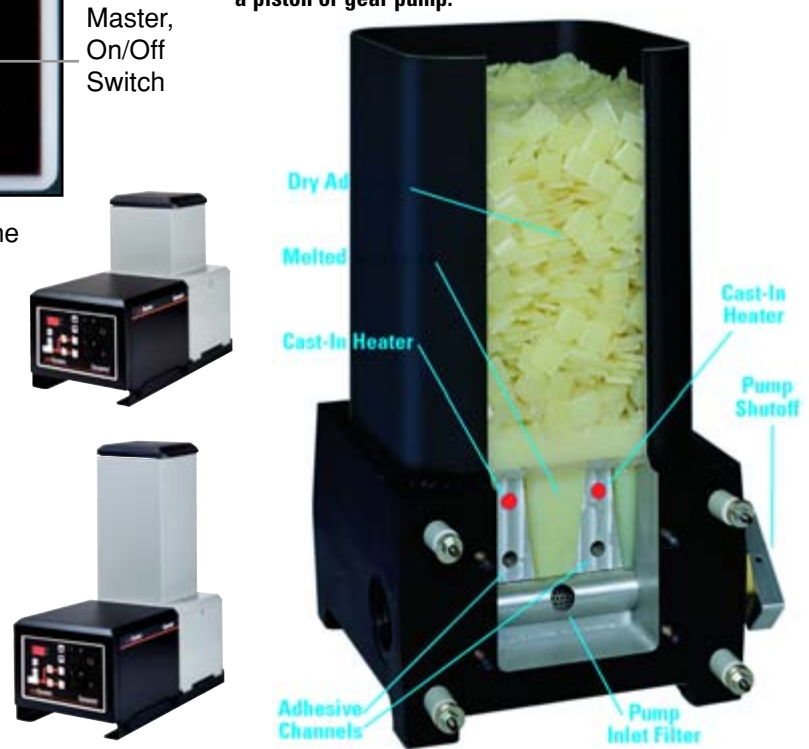

Control Panel Advantages

- Digital set-point and actual temperature indicator takes the guess work out of correct temperature monitoring and control
- Temperature indicator can be easily converted to Celsius or Fahrenheit readings
- Easy to operate; hopper, hose and applicator zone control icons
- Large scroll UP or scroll DOWN arrows permit the operator to quickly set the various zone temperatures
- Control panel locking limits operator access
- Pump motor on/off switch allows for manual control
- Standby temperature programming lowers the adhesive temperature during inactive periods
- Independent temperature control of the hopper, hoses and applicators to permit the precise metering of adhesive
- Platinum sensor accuracy for exact temperature control

DYNAMINI™ Advantages

- Exceptional value in a small hot melt unit
- Melt-On-Demand hopper grid virtually eliminates adhesive charring
- 7 year melt-on-demand hopper warranty
- Accurate and reliable microprocessor proportionate temperature controller
- Conforms to CE requirements

ITW Dynatec™

Adhesive Application Solutions



AMERICAS
ITW Dynatec
31 Volunteer Drive
Hendersonville, TN 37075
Telephone 615•824•3634
1•800•860•6150
Fax 615•264•5248
Dynatec@ITWDynatec.com

ASIA and PACIFIC
ITW Dynatec K.K.
Daiwashinagawa Bldg.,
7-15, Konan, 3-Chome
Minato-Ku, Tokyo 108-0075 Japan
Telephone 81•3•3450•5901
Fax 81•3•3450•8405
info@ITWDynatec.co.jp

EUROPE, AFRICA and MIDDLE EAST
ITW Dynatec GmbH
Industriestrasse 28
D-40822 Mettmann, Germany
Telephone 49•210•4915•0
Fax 49•210•4915•111
e.mail@ITWDynatec.de

itwdynatec.com